




**WHERE
PRECISION
DRIVES
PRODUCTION**

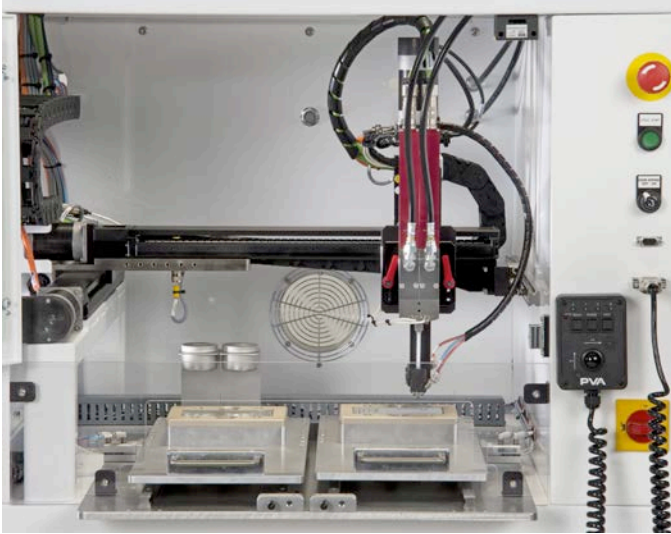

VALVE SPECIFICATIONS

Dimensions

27.1 mm x 54.2 mm x 265 mm
(1.07" x 2.14" x 10.43")

Operating Temperature

10°C – 40°C
(50°F – 104°F)

Flow Rate

.008 – 12 ml/min (at 1:1 ratio)

Viscosity Range

1 cps – 100,000+ cps

Inlet

1/8" NPT Female

Outlet

Sulzer K series mixer

Maximum Inlet Fluid Pressure

90 psi (6 bar)

Wetted Components

Stainless Steel, Kalrez®

VPX-2K Volumetric Pump

The VPX-2K Volumetric Pump is a dual dispenser designed for applying small volumes of 2-part adhesives in lines or dots with a high level of control. The unit uses the progressive cavity principle, which utilizes a specially machined auger-like rotor that couples with a rubberized seal to displace small sealed cavities of fluid through the unit in a continuous flow.



Close tolerances on the sealing mechanism provide pulse-free and drip-free operation with almost any viscosity fluid. The VPX-2K provides the capability of a gear plus rod displacement pump rolled into one convenient package.

Applications include:

- Potting
- Gasketing
- Bonding
- Dam & Fill
- Sealing
- Staking

The VPX-2K has many integrated features including:

- ▲ High precision +/- 1-2% (material dependent)
- ▲ Servo controlled
- ▲ Programmable 1:1 – 10:1 ratio
- ▲ Works with filled or unfilled fluids
- ▲ Will not damage or alter filler properties
- ▲ Syringe, cartridge, or remote reservoir feed
- ▲ Easy disassembly and cleaning
- ▲ Integrated pressure monitoring at the pump outlet

For more information, please contact PVA at info@pva.net or 1-518-371-2684.

One Mustang Drive
Cohoes NY 12047
tel 518 371 2684
fx 518 371 2688
www.pva.net