




**PVA**

**WHERE  
PRECISION  
DRIVES  
PRODUCTION**

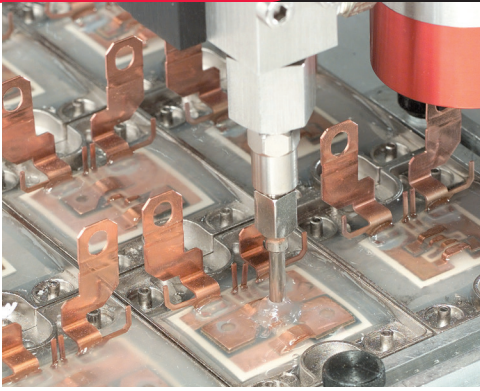

## VALVE SPECIFICATIONS

### Dimensions

159 mm x 38 mm x 59 mm  
(6.25 in x 1.50 in x 2.33 in)

### Viscosity Range

1 cps – Paste

### Operating Air Pressure

60-100 psi

### Inlet Fluid Pressure

50-350 psi

### Maximum Generated Outlet Fluid Pressure

500 psi

### Wetted Components

Stainless steel, Kalrez®, Teflon®

### Shot Size Range

0.10 cc to 1.45 cc

## MV500

### Positive Displacement Dispensing Valve

The MV500 is a true positive displacement metering valve capable of dispensing deposits of material in a highly accurate process. The deposit volume is determined by the metering cylinder's stroke adjustment setting and is not affected by variations in viscosity or material pressure.

The MV500 has many integrated features including:

- 0.10 cc to 1.45 cc shot size
- Reduced fluid volume inside valve for increased repeatability
- Front closing dispense valve on outlet check for accurate shutoff
- Stainless steel fluid section for optimum material compatibility
- Adjustable dispense rate
- Micrometer adjustment permits shot size modification
- 5:1 pressure advantage on metering cylinder
- Optional limit sensors for “ready to dispense” and “dispense complete” feedback

For more information please contact one of our sales representatives at (518) 371-2684.

