




**WHERE  
PRECISION  
DRIVES  
PRODUCTION**

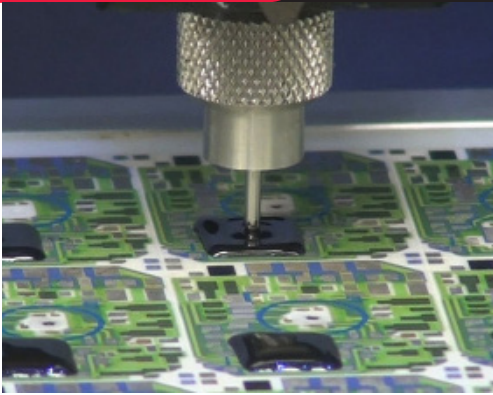

## VALVE SPECIFICATIONS

### Dimensions

167 mm x 72 mm x 56 mm  
(6.5 in x 2.8 in x 2.2 in)

### Weight

12.8 oz (0.36 kg)

### Encoder Resolution

57,000 counts per revolution

### Minimum Shot Size\*

0.005 in (0.13 mm) diameter

### Maximum Inlet Fluid Pressure

100 psi

### Viscosity Range

25,000 cps – Paste

### Auger Material

Carbide

### Valve Drive System

Servo Motor

*\*Material dependent*

## SVX

### Servo Controlled Auger Valve

The SVX auger valve is designed for processing micro volumes of material in precise, repeatable patterns. The auger rotation is controlled by a brushless servo motor with a programmable encoder providing 57,000 counts per revolution for a highly controlled process.

The SVX is ideal for dispensing all medium to high viscosity pastes, epoxies, and abrasive compounds in dot and bead patterns. The SVX can dispense dots as small as 0.005in in diameter\*.

The SVX has many integrated features including:

- Fixed or floating dispense tip with footed needle
- Virtually frictionless operation as auger and cartridge are constructed of carbide
- Quick release button releases pump from mounting bracket for quick maintenance and storage
- Selectable auger from shallow to deep cut design
- Removable cartridge and auger for easy cleaning and storage
- Software controlled dispense rate and shot size

For more information, please contact one of our sales representatives at [info@pva.net](mailto:info@pva.net) or (518) 371-2684.

