




**WHERE  
PRECISION  
DRIVES  
PRODUCTION**

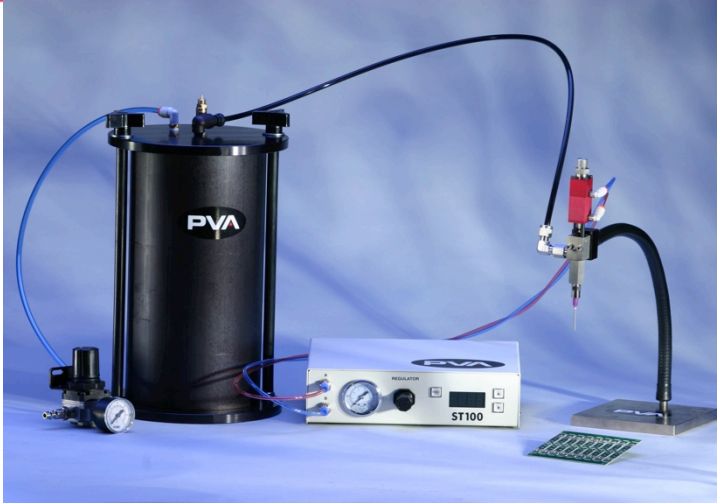

## SYSTEM SPECIFICATIONS

### WETTED COMPONENTS:

#### Valve

- Stainless Steel
- Teflon®
- Viton®

#### Tank

- Drop in Bottle

#### Material Line

- UV Safe Teflon®

### MAXIMUM MATERIAL PRESSURE:

70 PSI

### TANK VOLUME:

1 Liter Bottle Maximum

### DISPENSE MODES:

Timed - Manual - Teach

### VALVE TIP:

Luer-Lok™ Adapter

### OPERATING AIR PRESSURE:

80 PSI - 100 PSI

### SUPPLY VOLTAGE:

110 volt / 220 volt

## FC100-1LT-1-S

### Description of System Operation:

1. Bottle of material is placed in pressure pot.
2. Air pressure is applied from controller to valve.
3. Air pressure is applied to feed material to valve.
4. Flexible stand is adjusted for desired height.
5. Fluid pressure is adjusted to control flow.
6. Stroke adjuster on the valve can be adjusted for flow rate.
7. Shot timer is set for dispense mode (timed or manual).

For more information on PVA's dispensing capabilities, please contact one of our sales representatives at (518) 371-2684.

PVA also offers optional accessories for this system.

- FC1-SP - Valve spare parts kit
- B62-0767-SP - System spare parts kit

One Mustang Drive  
Cohoes NY 12047  
tel 518 371 2684  
fx 518 371 2688  
www.pva.net